

Ultrasonic welding machines

electrical
motion

*Faster, safer, more accurate and economical.
New, all-in-one technology.*



rinco[®]
ultrasonics

AROUND YOU EVERY DAY

RINCO ultrasonic welding machines



ULTRASONIC WELDING – THE ECONOMICAL WAY TO JOIN PLASTICS

Thanks to the short cycle times it requires, ultrasonic welding is the most efficient way to join two thermoplastic materials without additives and is therefore a particularly economical joining method. Injection-moulded parts, films or synthetic textiles can be welded using ultrasound in milliseconds and without leaving marks. The high-frequency mechanical oscillations also allow metal parts to be embedded into a plastic component.

We have designed a number of different ultrasonic welding machines to reflect the different materials used in applications and the different demands that the final welding results have to meet.

RINCO manufactures ultrasonic welding machines in three product series:

ELECTRICAL MOTION2 SERIES STANDARD SERIES and EASY SERIES

These machines meet every single requirement – from welding the very smallest through to large components.

Our ***ABW blister welding machine*** is the perfect solution for blister and film packaging.

Would you like a tailor-made solution for your specific requirements? Contact us and we will be happy to advise you.

COME AND DISCOVER THE OUTSTANDING QUALITY OF RINCO PRODUCTS FOR YOURSELF

We are proud that our efforts to achieve perfection have been recognised by official bodies. The ISO certifications awarded to us prove that Swiss values such as reliability and precision are important roots from which our corporate culture has grown. We will always offer consistently high quality and the very best service.



CE

All RINCO machines are **CE-compliant** and therefore meet high European standards.

RELIABILITY

RINCO machines operate very **reliably**, are practically maintenance-free and have a **long service life**.



EFFICIENT RINCO
AFTER SALES SERVICE

AFTER-SALES SERVICE

We help our customers out with **technical support** even after they have made a purchase.

ACCURATE ALIGNMENT


Base plates can be made level on the pedestal using jack screws, so the mount attached to the base plate will line up precisely with the horn.

QUALITY RIGHT FROM THE START

Our machines boast a **robust and rigid construction**, offer stability, provide great performance and guarantee optimum functionality and perfect welding results.





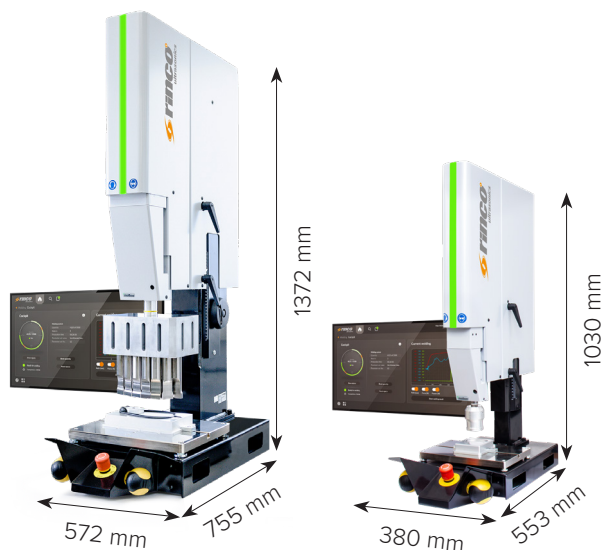


ELECTRICAL MOTION2 SERIES – Powerful and precise



Electrical Motion2-20 Electrical Motion2-35

**electrical
motion**

	Electrical Motion2-20	Electrical Motion2-35
KHZ Operating frequency:	20 kHz	35 kHz
 3000N Maximum force:	3000 N	745 N
 Drive:	Electric (230 V AC)	Electric (230 V AC)
 Maximum stroke:	100 mm	100 mm
 Weight:	135 kg	53 kg
 Height adjustment:	0–280 mm	0–180 mm

rinco[®]
ultrasonics

The Electrical Motion2 series is the perfect partner for complex ultrasonic welding operations that demand **maximum precision and great flexibility**. Thanks to the electric drive and the fact that the welding force, speed and amplitude can be regulated exactly, you can achieve outstanding welding results. The trigger and braking point parameters can be regulated independently of one another.

Events and changes are logged in the audit trail, which cannot be deleted, meaning that **traceability and process reliability** are guaranteed.

Ultrasonic welding machines from the Electrical Motion2 series are ideal for welding and punching thermoplastics, non-wovens and textiles.

COMPATIBLE GENERATORS

Electrical Motion2-20

Electrical Motion2-35

Compatible generator:	XDG2-20 with SCU2-20	XDG2-35 with SCU2-35
Output power:	2000 W, 3000 W	900 W

XDG2 ULTRASONIC GENERATOR AND SCU2 SERVO CONTROL UNIT

You can find more information about performance and features in the "Ultrasonic generators" product brochure.



FEATURES



E-DRIVE

The electric drive makes the ultrasonic welding machines in the Electrical Motion2 series **economical** and **highly precise**.



CALIBRATION

The force and amplitude **can be calibrated**. This makes the welding results reproducible and upholds the quality of your products.



13.3" TOUCH COLOUR DISPLAY

The touch colour display makes it easier to enter parameters and operate the machines. It **can swivel and is ergonomic**. What's more, it displays a graphic or table showing the most recent welding operations.

FIELDS OF APPLICATION



AUTOMOTIVE



HIGH-TECH



PACKAGING



FOOD



NON-WOVEN & TEXTILE



MEDICAL



HOUSEHOLD



COSMETICS

**WELDING
PUNCHING
RIVETING
EMBOSSING
BEADING
INSERTING
SEALING**

ELECTRICAL MOTION2 SERIES

ELECTRICAL MOTION2 SERIES – Powerful and precise



SUITABLE FOR CLEANROOMS

The Electrical Motion2 series is suitable for cleanrooms and certified to ISO 14644-1 **ISO class 6**. As such, it meets the high requirements placed on devices used in the medical sector.

PERFORMANCE LEVEL ■ PL e

Our machines deliver optimum safety for operators and maintenance personnel.

START POSITION CAN BE SELECTED AT WILL

The position of the actuator can be selected at will, reducing the cycle time.




MAXIMUM REPEATABILITY

The database for the ultrasonic welding machines can store **as many parameter data sets** as required. **Welding data can also be saved on the internal hard drive, in the Ethernet/ company network or on an external storage medium**, or read out via **PROFINET**.

FREELY PROGRAMMABLE STROKE MOVEMENT

Optimise your welding process by adjusting the stroke movement of the application accordingly.

- 0–1 Actuator moves from start position to brake position
- 1–2 Braking point from actuator speed to touchdown speed
- 2–3 Force builds up until trigger is reached
- 3–4 Welding process (up to 10 steps)
- 4–5 Force buildup without ultrasonics
- 5–6 Firming up and cooling-down phase
- 6–7 Afterpulse with ultrasound
- 7–8 Actuator moves back

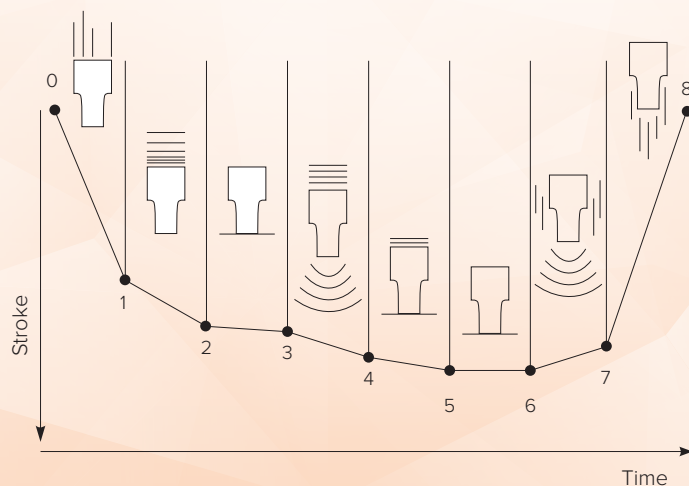

78%
saving
on energy
costs*

* Compared to a pneumatic ultrasonic welding machine



**FORCE
UP TO
3000 N**

ROBUST DESIGN

STATUS INDICATOR

The status light on the actuator changes from green to red in the event of an error.

**e-DRIVE
ACTUATOR**

**STROKE
100 mm**



**13.3" TOUCH
COLOUR
DISPLAY**

BASE PLATE

Plate with jack screws for attaching and precisely aligning the mount.

**SAFETY
EMERGENCY
STOP**

TWO-HAND RELEASE


**SERVO
CONTROL
UNIT
SCU2**



**RINCO
SOFTWARE**



**ULTRASONIC
GENERATOR
XDG2**

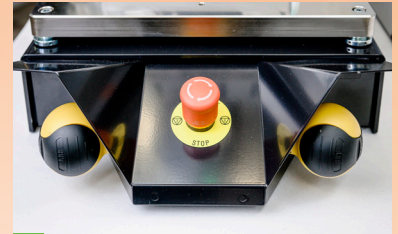

TWO-HAND RELEASE

Ergonomic safeballs (button option also available)



3-YEAR WARRANTY

Excluding converter, booster and tools

ELECTRICAL MOTION2 SERIES

rinco[®]
ultrasonics

ELECTRICAL MOTION2 SERIES – Powerful and precise

FUNCTIONS

ADJUSTABLE AMPLITUDE

You can change the value for the internal or external amplitude to between **40 and 100%** in 1% increments so as to achieve the best possible welding result.

8 WELDING MODES TO CHOOSE FROM

Thanks to the multitude of welding modes, you can find the **right setting for every application**, guaranteeing perfect welding. The following welding modes can be selected on the Electrical Motion2 series:



Welding time

W/S

Welding energy



W/S

Welding time AND/OR welding energy



Welding travel (absolute or differential)



Contact cut-off



Multi Melt Control



MULTI MELT CONTROL

The melting process can be split into 10 steps, in the context of which this mode can be used as an additional method to define steps without active ultrasonics.

ABSOLUTE QUALITY CONTROL

A **bar code reader** can be used to scan a welded component's bar code/QR code and assign it to a specific welding result.



SOUNDPROOF CABIN

Reliable noise protection solution



BAR CODE READER

Available as a hand unit or permanently mounted

MELTING PROCESS

The melting process can be split into 10 steps, meaning that it can be controlled precisely, and the parameters can also be set individually for each step. These features ultimately lead **to an optimum welding result**.

FORCE AND SPEED PROFILE

To optimise the welding process, a linear force build-up can be programmed.

AFTER-PULSE

To prevent lightweight workpieces from potentially getting stuck on the horn, an after-pulse can be activated.

TRIGGER (ULTRASONIC TRIGGER POINT)

The welding operation can be initiated using a trigger. You can choose from the following triggers:

- Time
 - Travel
 - Force
 - Off
 - External signal
 - Travel absolute and force
-



DATA EXPORT

A data string can be exported via RS232, Ethernet/a company network or a storage medium like a USB stick in order to log welding data. There is also the option to read out the data via **PROFINET**.



REMOTE ACCESS SERVICE

Remote maintenance can be set up for our RINCO after-sales service to carry out quick and efficient troubleshooting.




You can find other features as well as options and accessories for the ultrasonic welding machines from the Electrical Motion2 series at the end of this brochure.

TOOL CHANGE

QUICK AND EASY

Thanks to the quick-change system, tools can be replaced **within just a few minutes**. This minimises the risk of errors. The removable carriers are indexed.

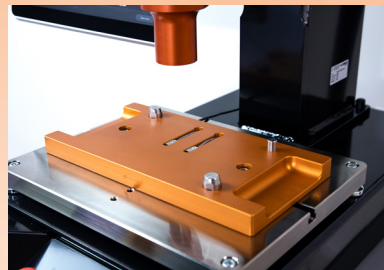

CHANGE THE MOUNT

Integrated sensor technology for automatic changeover of parameter data sets



CHANGE THE OSCILLATOR UNIT

In just a few steps

Lots of parameters need to be coordinated with one another if you are to achieve a perfect weld.

RINCO ultrasonic generators are designed to control ultrasonic welding machines. These generators provide options for you to set the precise parameters you need for your ultrasonic welding process. You can enter a range of values to specify **when the ultrasound will be triggered**.

The ultrasonic trigger point, also known simply as the trigger, can be linked to a number of different conditions.

—

These conditions, for example the type of material used to make the component, the configuration of the weld seam and the component size, are all taken into consideration and the appropriate trigger is used to define the exact parameters and, therefore, the perfect ultrasonic trigger point for the application in question. Your welding results will be top quality. What's more, these conditions can also help to protect tools.










































Choosing the right welding mode is one way of achieving a perfect end result. This mode can be customised for each application.

One welding mode can ensure that the end mass of the product being welded is always exactly the same once the welding process is complete, for example, whereas another welding mode will always perform the exact same welding steps on all components, but the end mass may vary. Wear to the welding tool, as experienced in cutting and punching applications, for example, can also be reduced by choosing the right mode. Whatever your desired result: **together we will find the perfect, reliable solution.**

You can count on our knowledge and commitment right from the start. And even after projects are complete, we are always ready to answer your questions. Our devices have been designed such that we can perform remote diagnostics at any time, so any errors can be rectified efficiently.



		Electrical Motion2-20	Electrical Motion2-35	Standard 3000	Standard 745	Standard 50	Easy 3000	Easy 745	ABW35
									
	Compatible generator	XDG2-20/SCU2-20	XDG35/SCU35	ADG20	ADG35	ADG70	SDG20	SDG35	SDG35
KHZ	Frequency	20 kHz	35 kHz	20 kHz	35 kHz	70 kHz	20 kHz	35 kHz	35 kHz
	Force	3000 N	745 N	3000 N	745 N	50 N	3000 N	745 N	745 N
	Output power (W)	3000, 2000	900	3000, 2000, 1500, 1000	900, 600, 400	100	2000, 1500, 1000	750, 400	750, 400
	Dimensions W x L x H (mm)	572 x 755 x 1372	380 x 553 x 1030	400 x 760 x 1345	316 x 520 x 1066	320 x 460 x 505	400 x 727 x 1345	316 x 529 x 1066	120 x 156 x 489
	Weight	135 kg	53 kg	115 kg	41 kg	15.5 kg	120 kg	41 kg	11.2 kg
	Stroke	100 mm	100 mm	100 mm	100 mm	25 mm	100 mm	100 mm	6 mm
	Warranty: 2 years	3 years	3 years	✓	✓	✓	✓	✓	✓
	Amplitude adjustment	40–100%, 1% increments/ external	40–100%, 1% increments/ external	40–100%, 1% increments/ external	40–100%, 1% increments/ external	40–100%, 1% increments/ external	15–100%, 1% increments/ external	15–100%, 1% increments/ external	15–100%, 1% increments/ external
	Audit trail	✓	✓						
	Calibration	✓	✓						
	Cleanroom, ISO class 6	✓	✓	✓					
	Welding time	✓	✓	✓	✓	✓	✓	✓	✓
W/S	Welding energy	✓	✓	✓	✓	✓	✓	✓	✓
	Welding travel	✓	✓	✓	✓	✓			
	Contact cut-off (mode)	✓	✓	✓	✓	✓	✓	✓	✓
	Continuous mode						✓	✓	
	Multi Melt Control (mode)	✓	✓						
	Trigger point	Time, travel, force, off, external signal, travel absolute & force	Time, travel, force, off, external signal, travel absolute & force	Time, travel, pressure, off, external signal	Time, travel, pressure, off, external signal	Time, travel, pressure, off, external signal	On, off, time, start	On, off, time, start	On, off, time, start
	Data transmission	✓	✓	✓	✓	✓	✓	✓	✓
	Database	✓	✓	✓	✓	✓			
	Associated software	✓	✓						
	Digital technology	✓	✓	✓	✓	✓	✓	✓	✓
	Electric drive	✓	✓						
	Pneumatic drive			✓	✓	✓	✓	✓	✓
	Height adjustment	✓	✓	✓	✓	✓	✓	✓	✓
	Multilingual	✓	✓	✓	✓	✓	✓	✓	✓
	Protection against power overload	✓	✓	✓	✓	✓	✓	✓	✓
	Protection against overheating	✓	✓	✓	✓	✓	✓	✓	✓
	Part counter	✓	✓	✓	✓	✓	✓	✓	✓
	Remote access	Internal, external							
	Softstart, softstop	✓	✓	✓	✓	✓	✓	✓	✓
	Touch display	✓	✓						
	User administration	✓	✓	✓	✓	✓	✓	✓	✓
OCTS	Quick Change Tool System (oscillation system)	✓	✓						
SMED	Quick Tool Change (sonotrode and anvil)	✓	✓	✓	✓	✓	✓	✓	

	Electrical Motion2-20	Electrical Motion2-35	Standard 3000	Standard 745	Standard 50	Easy 3000	Easy 745	ABW35
								
Workstation	✓	✓	✓	✓				
SSK soundproof cabin	✓	✓	✓			✓		
35 kHz tool case		✓		✓			✓	✓
20 kHz tool case	✓		✓			✓		
Footswitch with emergency stop								✓
Footswitch								✓
Film transport	✓	✓	✓	✓		✓	✓	
ADG device switch box			✓	✓	✓			
Device switch box for hand units						✓	✓	✓
DUO TOUCH two-hand control device			✓	✓	✓		✓	
Compound table					✓			
Column extension	300 mm/200 mm/100 mm	150 mm/100 mm	300 mm/200 mm	100 mm		300 mm/200 mm	100 mm	

Workstation



Available with automatic drawer or rotative table for ergonomic working. Equipped with soundproofing.

SSK sound enclosure cabin



Reduces the noise level by up to 20 dB.

35 kHz tool case



Tool for setting up service work.

20 kHz tool case



Tool for setting up service work.

Footswitch with emergency stop button



To trigger the welding cycle using your foot, complete with emergency stop button.

Footswitch



To trigger the welding cycle using your foot.

Film transport



To protect the application from marks.

ADG device switch box



Designed for small multi-head systems if no higher-level control is required or if PLC is to be kept to a minimum. This enables small special systems to be built from only standard components.

DUO TOUCH two-hand control device



For increased ergonomic requirements, compatible with cleanrooms.

Compound table




Precise compound table for fine-tuning. Mounted using clamps.


Column extension



Extension for large components.

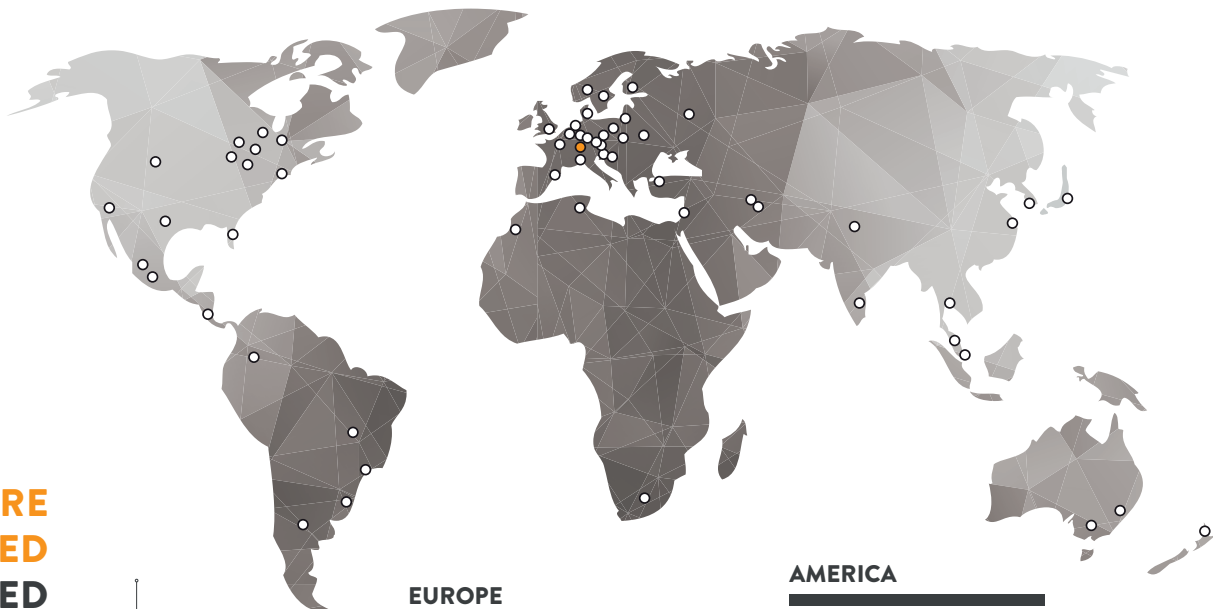

**WE ARE
FOCUSED
COMMITTED
GLOBAL
LOCAL**



EUROPE

SWITZERLAND

rincoultrasonics.ch

GERMANY

rincoultrasonics.de

FRANCE

rinco-france.com

SPAIN

rincoultrasonics.es

ITALY

rincoultrasonics.it

SWEDEN

rincoultrasonics.se

DENMARK

rincoultrasonics.dk

POLAND

rincoultrasonics.pl

AMERICA

USA

rinco-usa.com

MEXICO

rincoultrasonics.mx

ASIA

CHINA

rincochina.com

INDIA

rincoindia.com

JAPAN

uthe.co.jp

MALAYSIA

rincoultrasonics.com.my

AFRICA

MOROCCO

rincoultrasonics.com



CONTACT US FOR MORE INFORMATION

rincoultrasonics.com
info@rincoultrasonics.com
+41 71 466 41 00

Industriestrasse 4
CH-8590 Romanshorn
Switzerland



SWISS MADE
SINCE 1976